


Coonara Gas Framing Specifications

Grange – Grange Classic/Slimline – Grange Royal Classic/Slimline

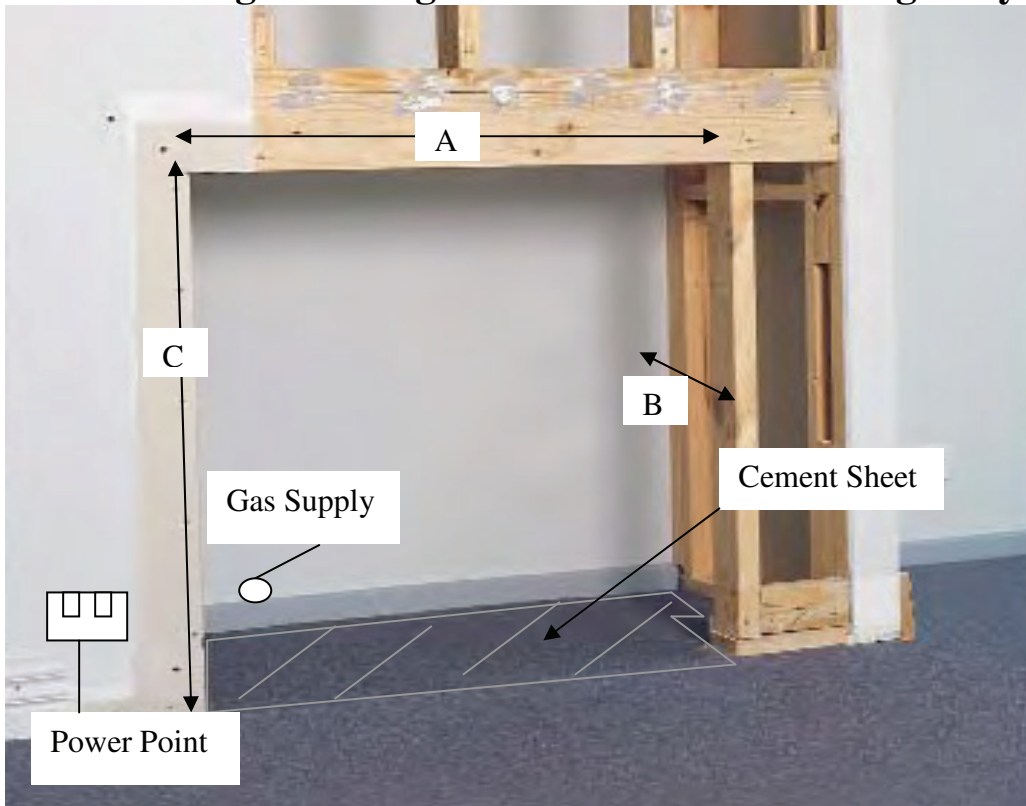


Grange
A) 750mm
B) 400mm
C) 650mm

Grange Classic & Slimline
A) 750mm
B) 600mm
C) 650mm

Grange Royal Classic & Slimline
A) 750mm
B) 600mm
C) 650mm

- * Gas Inlet to be ½” Fem BSP
- * Power Outlet left hand side
- * Cement Sheet Required

Hermitage – Chateau – Chateau series 2

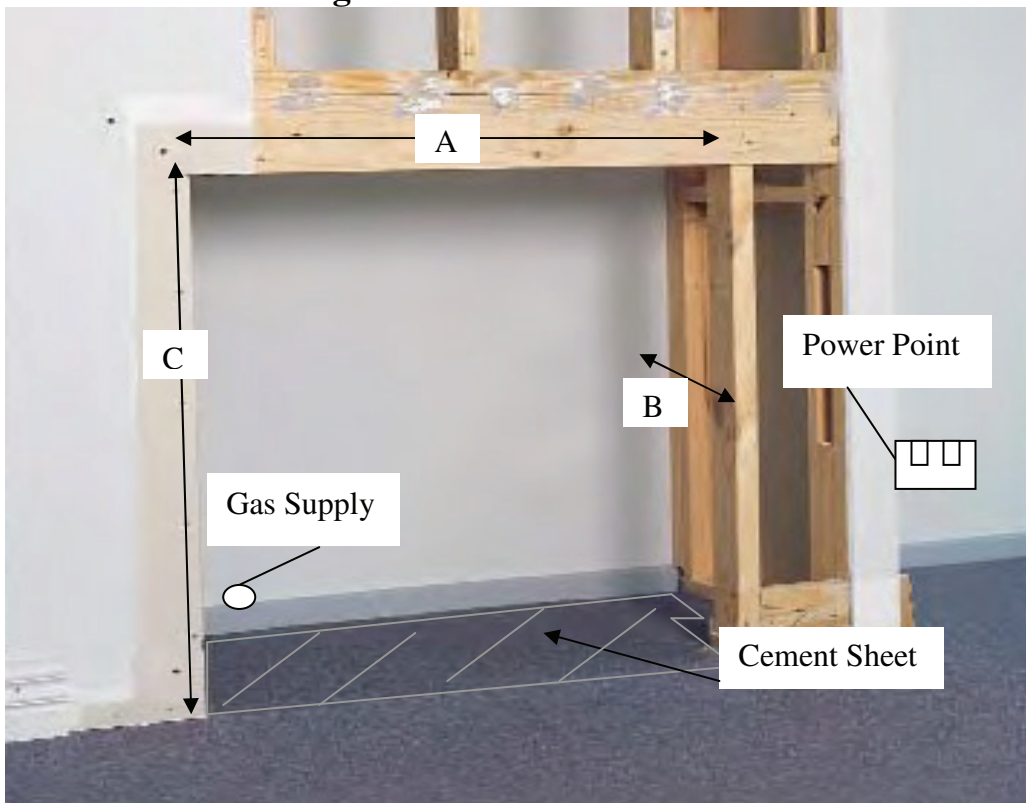


Hermitage
A) 740mm
B) 400mm
C) 640mm

Chateau
A) 740mm
B) 500mm
C) 640mm

Chateau Series 2
A) 740mm
B) 500mm
C) 640mm

- * Gas Inlet to be ½” M/i BSP
- * Power Outlet right hand side
- * Cement Sheet Required

BAROSSA, CLEARVIEW & MYSTIQUE

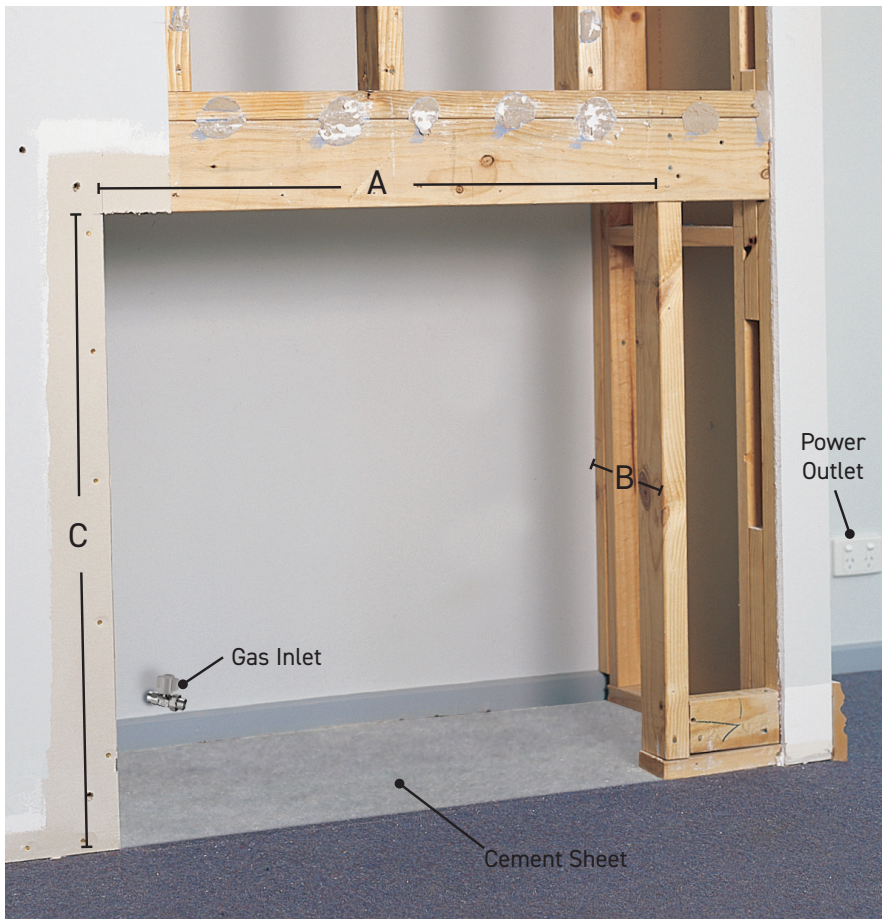

BAROSSA

- A) 1000mm
- B) 400mm
- C) 900mm

MYSTIQUE

- A) 740mm
- B) 500mm
- C) 640mm

CLEAR VIEW

NEW APPLICATION:

FRONT OPENING

- A) 1000mm
- B) 245mm (includes cladding)
- C) 900mm

REAR OPENING

- A) 1000mm
- B) 245mm (includes cladding)
- C) 900mm

EXISTING WALL APPLICATION:

FRONT OPENING


- A) 1000mm
- B) Up to 245mm Max.
- C) 900mm

REAR OPENING

- A) 1125mm
- B) Up to 245mm Max.
- C) 900mm

- Gas Inlet to be 1/2" M/i BSP
- Power Outlet right hand side
- Cement Sheet required

MOSMAN

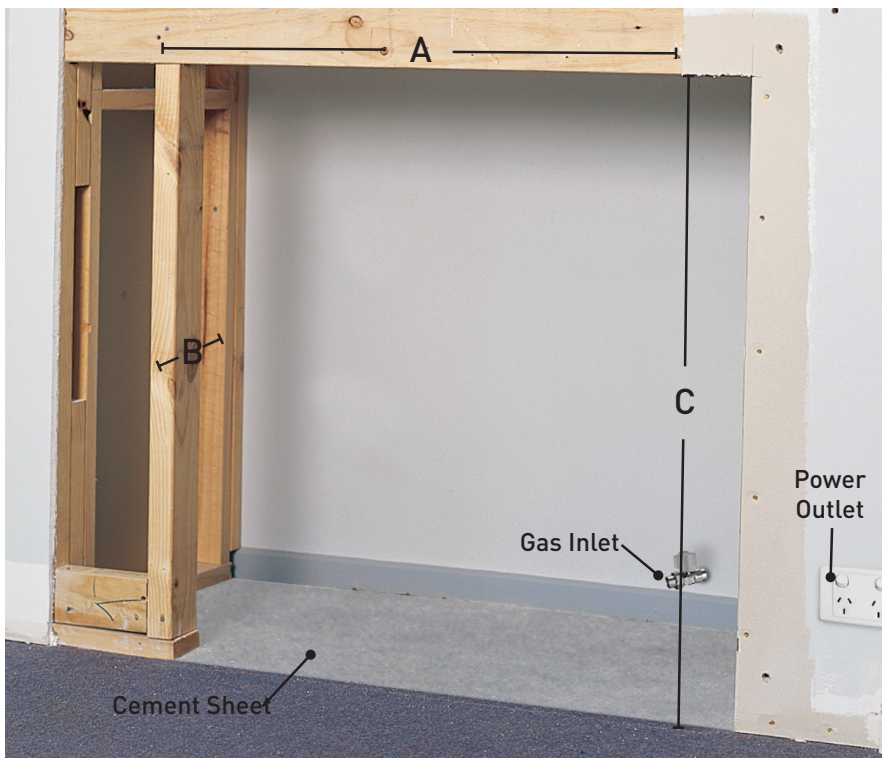

MOSMAN

- A) 1255mm
- B) 535mm
- C) 925mm

- Gas Inlet to be 1/2" FEM BSP
- Power Outlet right hand side
- Cement Sheet required (for flat level base)